由 Autodesk 教育版产品制作

All Pages Of This Edition Approved			
Signature:		Date:	

REV.	DESCRIPTION	REVISER	DATE
A0	新图	liugong	2020-8-7
A1	按要求背光绿灯更改为黄绿灯	liugong	2020-8-12

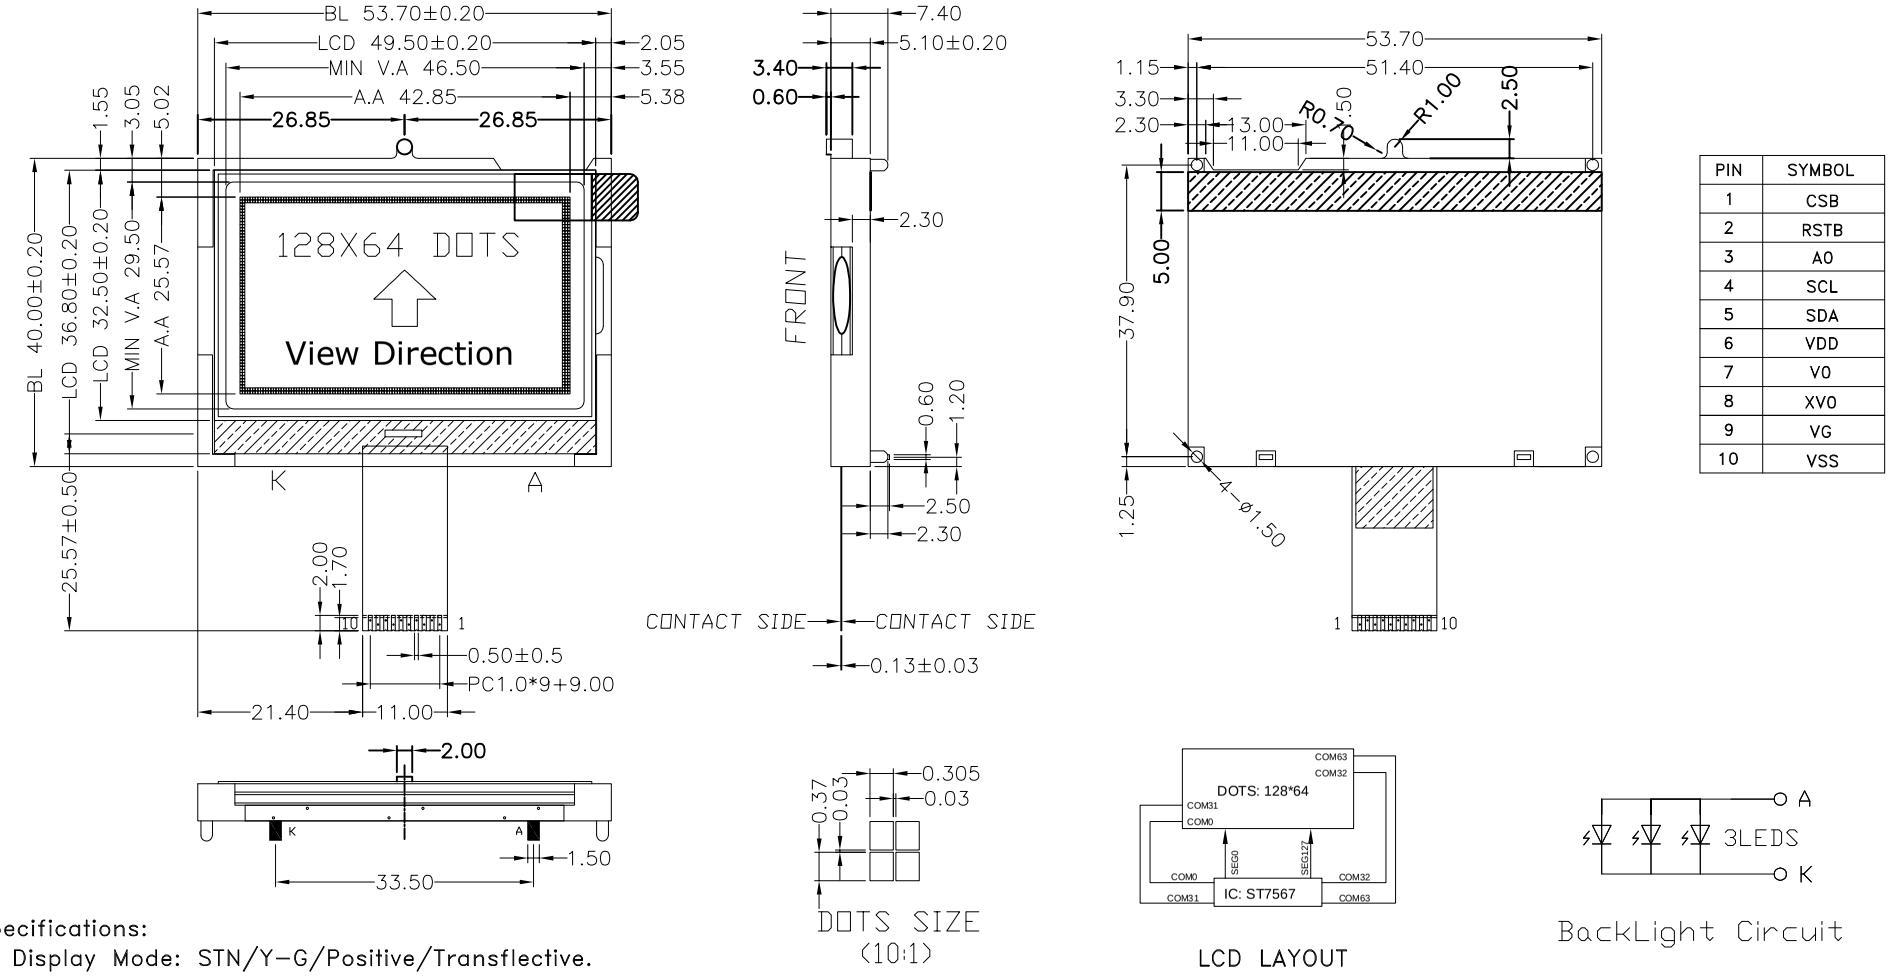

PIN	SYMBOL
1	CSB
2	RSTB
3	A0
4	SCL
5	SDA
6	VDD
7	V0
8	XV0
9	VG
10	VSS

DOTS SIZE
(10:1)

LCD LAYOUT

BackLight Circuit

Specifications:
1. Display Mode: STN/Y-G/Positive/Transflective.
2. Viewing Angle: 6 O'clock.
3. Drive Method: 1/65Duty, 1/9Bias, Vlcd=9.4±0.2V, VDD=3.3V.
4. Backlight Type: Y-G, 3.0±0.2V, 30mA, 3pcs.
5. Operating Temp: -30°C~+80°C.
6. Storage Temp: -30°C~+80°C.
7. Connector: COG+FPC
8. Drive IC: ST7567(COG)
9. Customer P/N: --
10. Unmarked Tolerance: ±0.2mm
11. Requirements On Environmentall Protection: RoHS

SHENZHEN ENRICH ELECTRONICS CO., LTD.

TEL: +86-755-27864416, FAX: +86-755-27864653

	NAME:	DATE:	MODEL NUMBER :		SHEET:	1 OF 1
DESIGN BY:	liugong	2020-8-12	ENH-DG128064-198-YSPHYF			
CHECKED BY:					NAME:	LCM
APPROVED BY:			DEFAULT UNITS: mm	PROJECTION		

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
PDF created with pdfFactory Pro trial version www.pdffactory.com